


1-Line , Uni-directional , Transient Voltage Suppressor

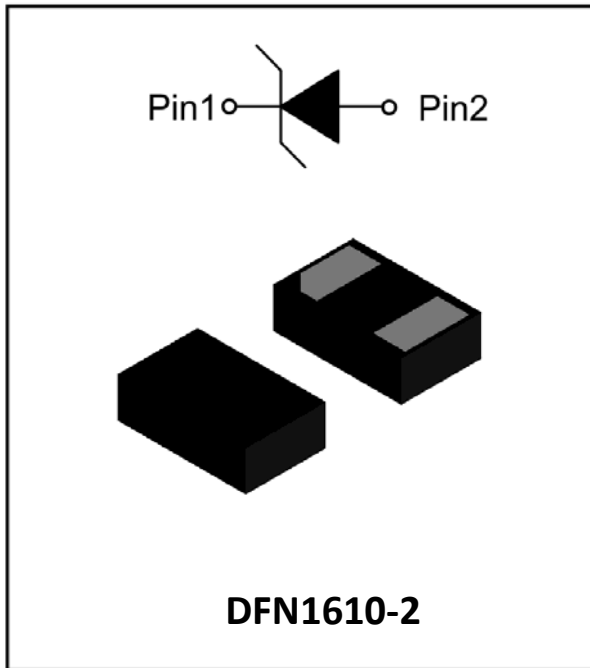

Features


- Ultra small package
- Stand-off voltage: 4.5V ~5V
- Transient protection for each line according to
 - IEC61000-4-2(ESD): $\pm 30\text{kV}$ (contact)
 - IEC61000-4-4 (EFT): 40A (5/50ns)
 - IEC61000-4-5(surge): 7A (8/20 μs)
- Low clamping voltage
- RoHS Compliant

Applications


- Power supply protection
- Power management
- Battery Contacts

Mechanical Characteristics

- Package: DFN1610-2L
- Case Material: "Green" Molding Compound.
- Moisture Sensitivity: Level 3 per J-STD-020
- Marking Information: See Below

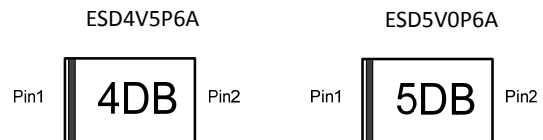

■ Definitions of electrical characteristics

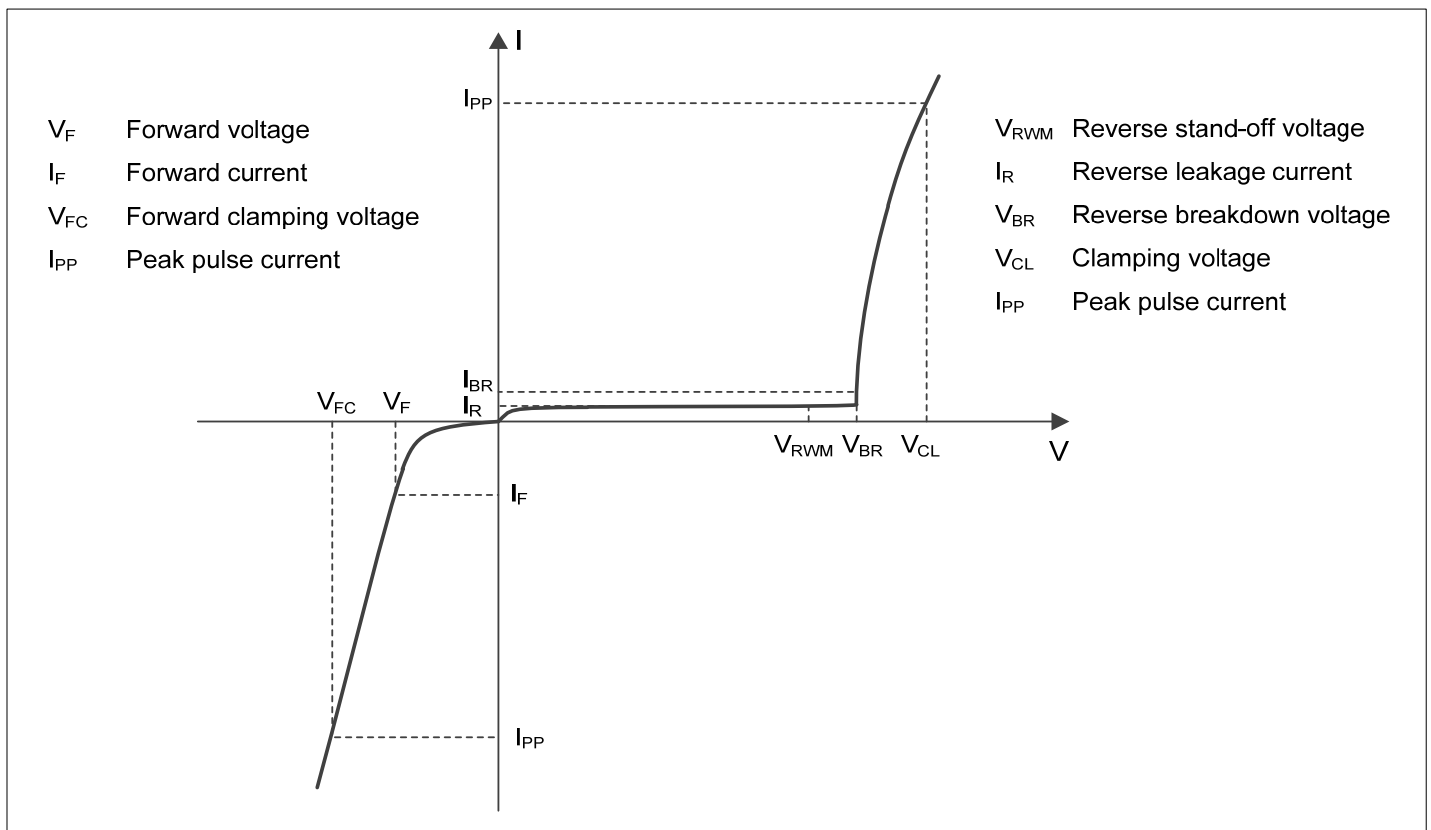



ESD4V5P6A THRU ESD5V0P6A

■Absolute Maximum Ratings (Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	VALUE	UNIT
Peak pulse power ($t_p = 8/20\mu s$)	P_{pk}	2400	W
ESD IEC61000-4-2(ESD)Air	V_{ESD}	± 30	KV
ESD IEC61000-4-2(ESD)Contact		± 30	KV
Operating Temperature Range	T_J	-55~125	°C
Storage Temperature Range	T_{STG}	-55~150	°C

■Electrical Characteristics (Ta=25°C Unless otherwise specified)

Part Number	Reverse Working Voltage $V_{RWM}(V)$	Breakdown Voltage $V_{BR}(V)@I_T=1mA$			Reverse Leakage Current $I_R(\mu A)@V_{RWM}$		Forward Voltage $V_F(V)@I_F=20mA$		Junction Capacitance $C_j(pF)@V_R=0V, f=1MHz$	
	Max	Min	Typ	Max	Typ	Max	Min	Max	Typ	Max
ESD4V5P6A	4.5	4.9	5.4	6.0	-	1	0.45	1.25	600	700
ESD5V0P6A	5.0	5.2	6.4	7.0	-	1	0.45	1.25	500	600

Part Number	Rated peak pulse current IPP (A) ¹⁾	Clamping voltage VCL(V) @ IPP (A) ¹⁾	
	Max	Typ	Max
ESD4V5P6A	170	12	14
ESD5V0P6A	160	12	14

Notes:


(1). Non-repetitive current pulse, according to IEC61000-4-5. (8/20μs current waveform).




ESD4V5P6A THRU ESD5V0P6A

■ Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)


8/20 μs waveform per IEC61000-4-5

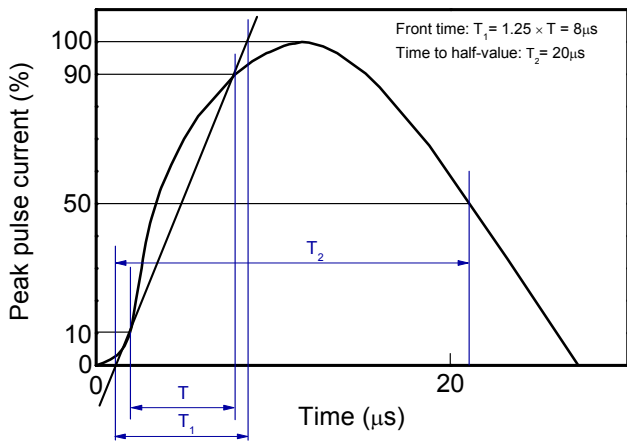


Clamping voltage vs. Peak pulse current

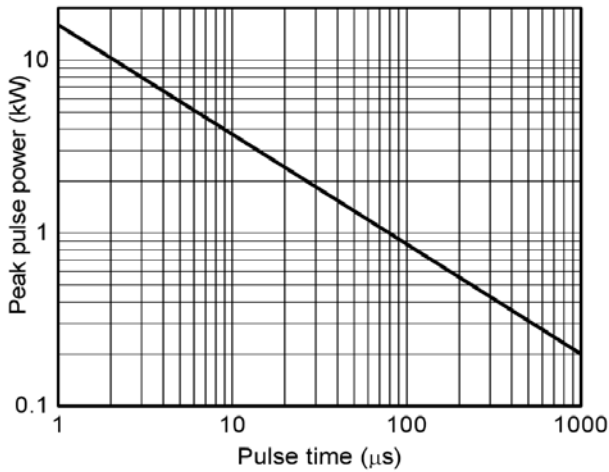


Power derating vs. Ambient temperature

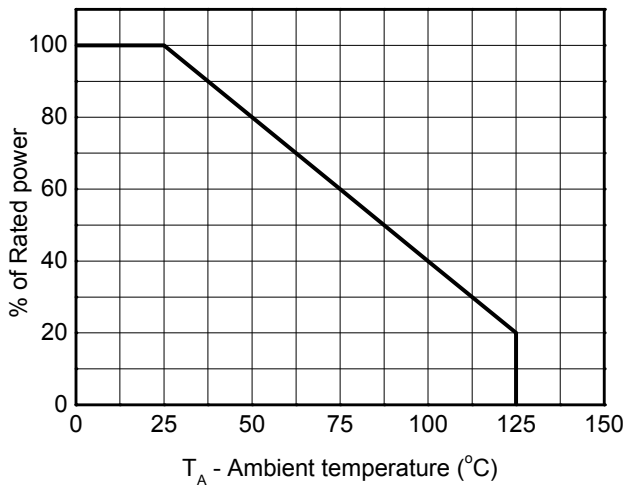

Contact discharge current waveform per IEC61000-4-2

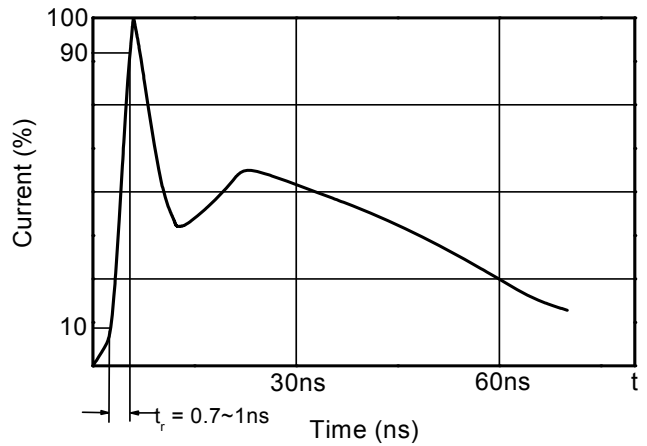


Non-repetitive peak pulse power vs. Pulse time

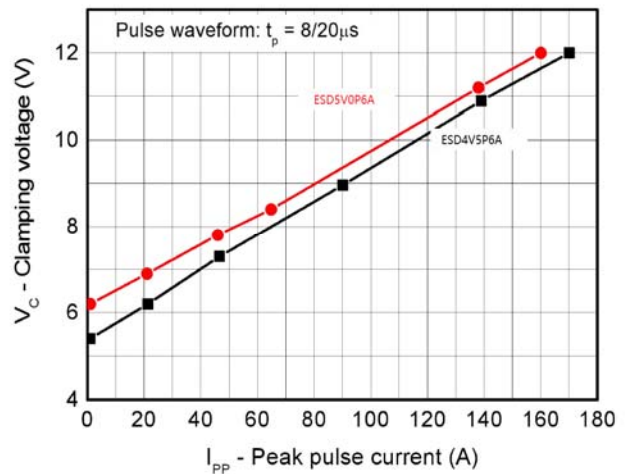




ESD4V5P6A THRU ESD5V0P6A

■ Outline Dimensions

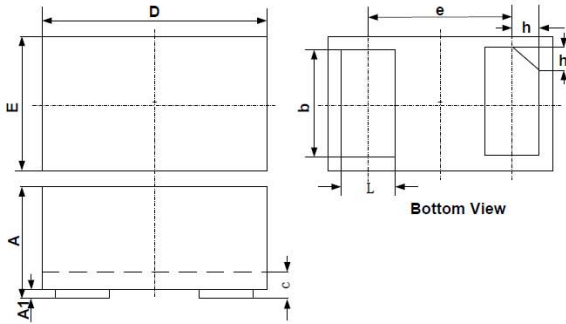

SYM	DIMENSIONS					
	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.45	0.50	0.55	0.018	0.020	0.022
A1	0.00	0.02	0.05	0.000	0.001	0.002
b	0.75	0.80	0.85	0.030	0.032	0.034
c	0.10	0.15	0.20	0.004	0.006	0.008
D	1.55	1.60	1.65	0.062	0.064	0.066
e	1.10 BSC			0.044 BSC		
E	0.95	1.00	1.05	0.038	0.040	0.042
L	0.35	0.40	0.45	0.014	0.016	0.018
h	0.15	0.20	0.25	0.006	0.008	0.010

■ Recommend land pattern (Unit:mm)

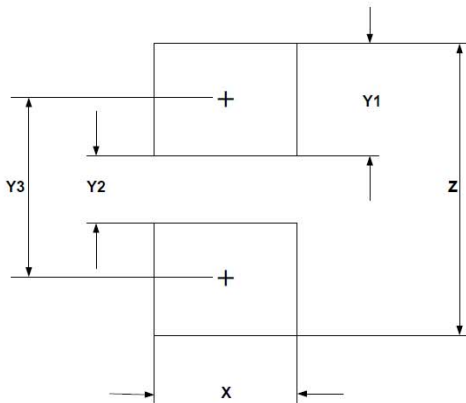

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
X	1.00	0.040
Y1	0.62	0.025
Y2	0.60	0.024
Y3	1.22	0.049
Z	1.85	0.074

Notes:

This recommended land pattern is for reference purposes only. Please consult your manufacturing group to ensure your PCB design guidelines are met.



ESD4V5P6A THRU ESD5V0P6A

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.